

CD1110 Low Ranges Dynamic Torquemeter

SPECIFICATIONS

- Range from ± 0.05 to ± 2 Nm (± 0.04 to ± 1.5 lbf.ft)
- Keyed Shaft couplings
- Integrated Mechanical Stops
- Aluminum shaft
- Cable Gland or Connector Output

Features

- Over torque protection
- Integrated Mechanical Stops
- High Level Output Model with Integrated Amplifier

Applications

- Low range dynamic applications
- Process control equipment
- Test and Measurement
- Robotics and effectors
- Laboratory and Research

The **CD1110** of dynamic torque sensors have extremely low operating ranges protected by mechanical stops permitting an overload of 10 times the measurement range.

The rugged design provides accurate bidirectional torque measurements at rotary speed up to 2000 rpm.

As option, the **CD1110** can receive an on-board amplifier for high-level voltage output. Signal amplification is accomplished before transmission via the slip ring assembly, thus eliminating the noise generated by the contacts. It is also possible to eliminate the contact residual drag torque by placing the transducer sensing element directly in contact with the torque to be measured.

With a long standing experience as a designer and manufacturer of sensors, TE CONNECTIVITY often works with customers to design or customize sensors for specific uses and testing environments.

On request, Instruction documents can be provided to ease the selection and use of our sensors and provide helpful tips.

CD1110

Low Ranges Dynamic Torquemeter

Standard Ranges (Fs)

Range in Nm (FS)	0.05	0.1	0.3	0.5	1	2
Range in lbf.ft (FS)	0.037	0.074	0.221	0.369	0.738	1.475
Unamplified output in mV	±150	±150	±150	±15	±15	±15
Offset in mV	<±10	<±10	<±10	<±1	<±1	<±1
Rotation in rpm	≤2000 (Bidirectional operation)					

Performance Specifications (Typical Values At Temperature 23±3°C)

Parameters	
Operating Temperature Range (OTR)	-20 to 80° C (-4 to 176° F)
Compensated Temperature Range (CTR)	0 to 60° C (32 to 140° F)
Zero Shift in CTR	Up to 0.3Nm: <±2% F.S./50°C [1/100°F] From 0.5Nm: <±0.5% F.S./50°C [1/100°F]
Sensitivity Shift in CTR	Up to 0.3Nm: <±2% of reading /50°C [1/100°F] From 0.5Nm: <±1% of reading /50°C [1/100°F]
Over-Range	
Without Damage	10 x F.S. or 10Nm [max. 8lb-ft]
Accuracy	
Combined Non-Linearity & Hysteresis	±0.25% F.S.
Protection index	IP50

Electrical Characteristics

Model	CD1110 ¹	CD1110-A1	CD1110-A2
Supply Voltage	1 to 10Vdc regulated	10 – 30Vdc	±12 to ±18Vdc
Sensitivity "FSO" ²	See table "FS"	±2V ±0.2V	±5V ±0.2V
Zero Offset ²	See table "FS"	2.5V ±0.2V	0V ±0.2V.
Input Impedance / Consumption	Up to 0.3Nm: 2250Ω From 0.5Nm: 700Ω	<30mA	<30mA
Output Impedance	Up to 0.3Nm: 750Ω From 0.5Nm: 700Ω	1 kΩ ⁶	1 kΩ ⁶
Insulation under 50Vdc	≥100MΩ	≥100MΩ	≥100MΩ



Notes

1. Sensors are calibrated with 10Vdc power supply as standard.
2. Signal goes positive in CW strain with standard wiring configuration. Other signal output on request
3. Electrical Termination: Connector output including mate
4. Material: Body and housing in aluminum alloy
5. Connection : Keyed shaft standard, other connection types on request (smooth shaft, cotter pin, etc)
6. Output impedance < 100Ω on request
7. CE conformance according to EN 61010-1, EN 50081-1, EN 50082-1

CD1110

Low Ranges Dynamic Torquemeter

Dimensions & Wiring Schematic (In Metric And Imperial)

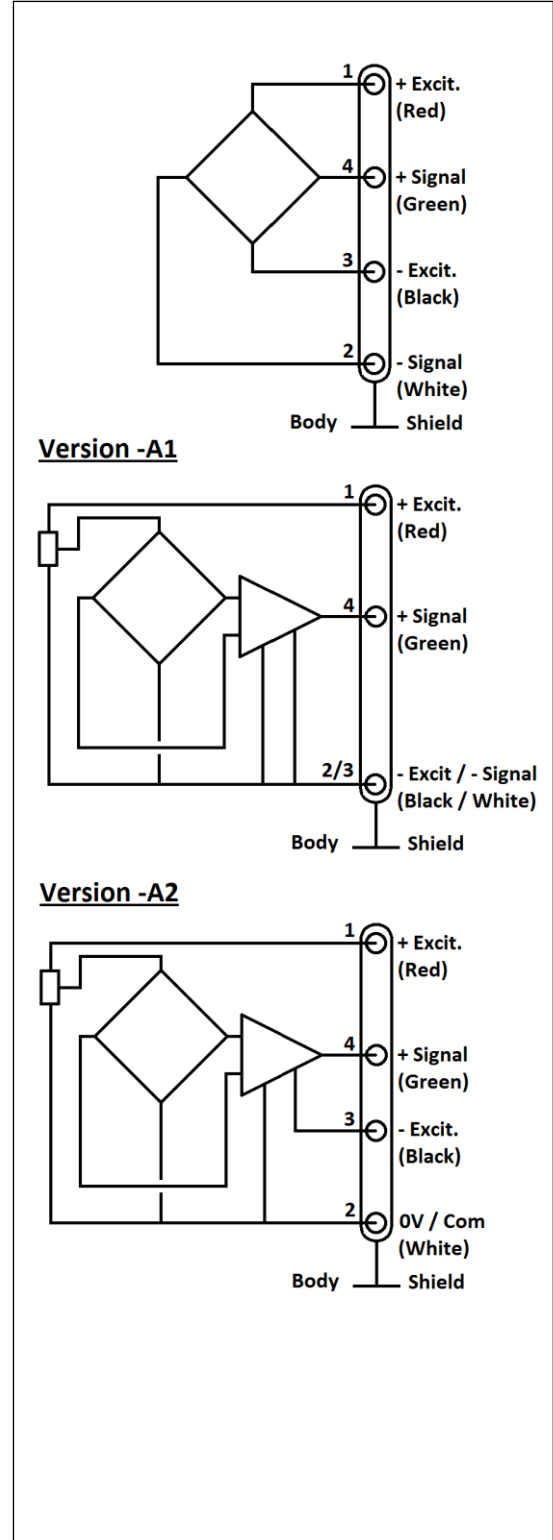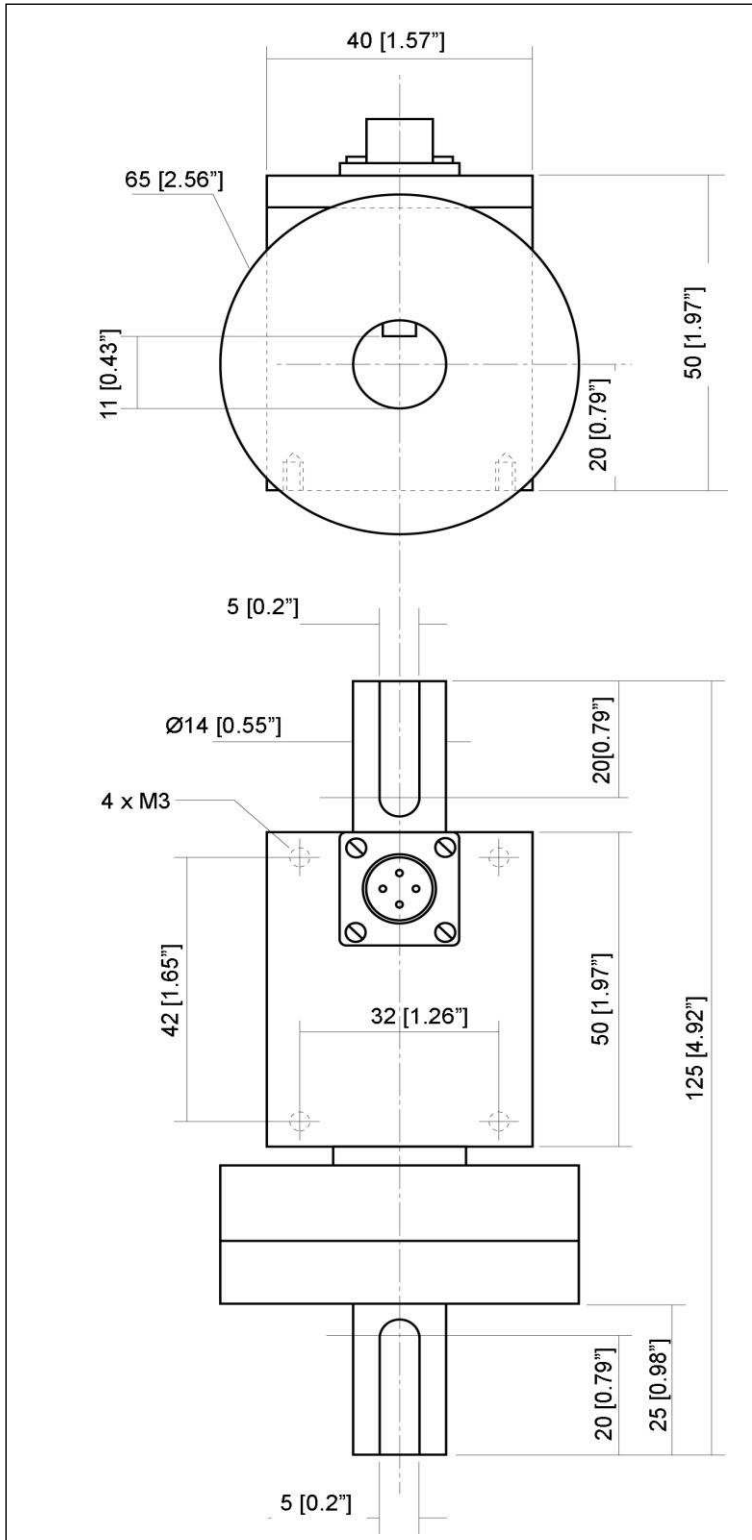


CD1110

Low Ranges Dynamic Torquemeter

Options

A1 : Amplified Tension output with unipolar power supply
A2 : Amplified Tension output with bipolar power supply
FMC : Mating connector fitting with 2 m [6.6 ft] cable
V00 : Non-standard power supply calibration, replace "00" with value in Volt (standard 10Vdc, unamplified sensor only)
PE : Cable Gland Termination with 2 m [6.6 ft] cable

Ordering Information

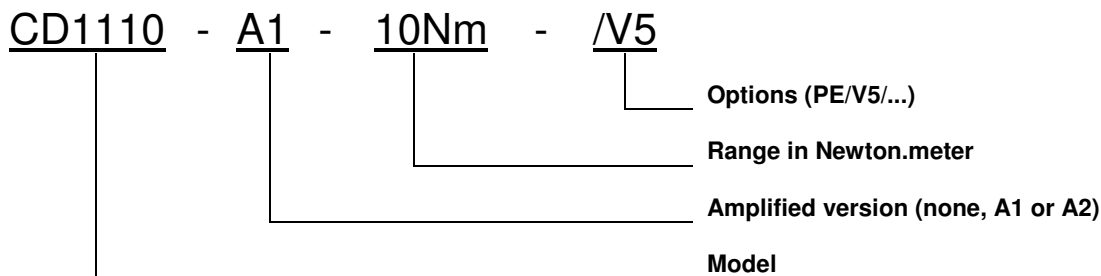

Supplied Accessories

EFMX-4M : mating plug Jaeger 530-801-006 with clamp 530-841-006 standard

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

中国大陆
西安鑫源宇通电子科技有限公司
陕西省西安市高新区科技六路西段
西安国家数字出版基地A栋12402
Tel: +400-780-9688
sales@senstechxyz.com

中国香港
深大实业有限公司
香港新界沙田安平街6号新贸易
中心B座13楼06室
Tel: +86 17792099916
info@caltropinstruments.com

新加坡
深大实业有限公司
香港新界沙田安平街6号新贸易
中心B座13楼06室
Tel: +86 17792099919
info@senstechxyz.com