

Introducing Celesco's CH25 Incremental Encoder. This encoder comes with a 2.5-inch square flange, 3/8-inch shaft and a push-pull output driver. The CH25 also accepts a wide input voltage from 5 to 30 VDC and is available in resolutions from 100 to 5000 pulses per revolution.

This encoder is perfect for many applications including electric motors, packaging machines, conveyor systems and elevators.

Ordering Information

Order Number	Pulses Per Turn
CH25-100	100
CH25-360	360
CH25-500	500
CH25-1024	1024
CH25-2048	2048
CH25-4096	4096
CH25-5000	5000

Shielded Cord-Set



order #: 9036810-0050
(w/ **straight** cable socket)

6.5 ft (2M)

CH25 Rotary Incremental Encoder

100 to 5000 Pulses per Revolution

5...30 VDC • Push-Pull Driver

M12 Connector • IP67

In Stock for Quick Delivery

General

Pulses Per Revolution Options	100, 360, 500, 1024, 2048, 4096, 5000
Output Driver	push-pull ($V_{out} = V_{in}$)
Input Voltage (V_{in})	5...30 VDC
Input Current	70 mA max.
Load	40 mA max.
Output Level (@ 20 mA load), High	$> V_{in} - 10\%$
Output Level (@ 20 mA load), Low	< 2.5 VDC
Pulse Frequency	200 kHz
Circuit Protection	inverse-polarity protection
Electrical Connection	M12 (8-pin) connector (mating plug not included)

Mechanical

Housing	aluminum, powder-coated
Flange	aluminum
Shaft	stainless steel
Shaft Loading, Radial	49.5 lbs (220 N) max.
Shaft Loading, Axial	27 lbs (120 N) max.
Starting Torque	approx. 1.4 oz-in. (1 N-cm) @ ambient temperature
Bearing Type	precision ball bearings
Bearing Life @ 100% of full rated load	10^9 shaft revolutions
Bearing Life @ 40% of full rated load	10_{10} shaft revolutions
Bearing Life @ 20% of full rated load	10^{11} shaft revolutions
Maximum Operating Speed	8000 RPM
Weight (approx)	10.5 oz (300g)


Environmental

Enclosure Design	IP67
Shaft Seals	IP65
Operating Temperature	-4° to 176°F (-20° to 80°C)
Storage Temperature	-22° to 176°F (-30° to 80°C)



CH25

Rotary Incremental Encoder


Outline Drawing

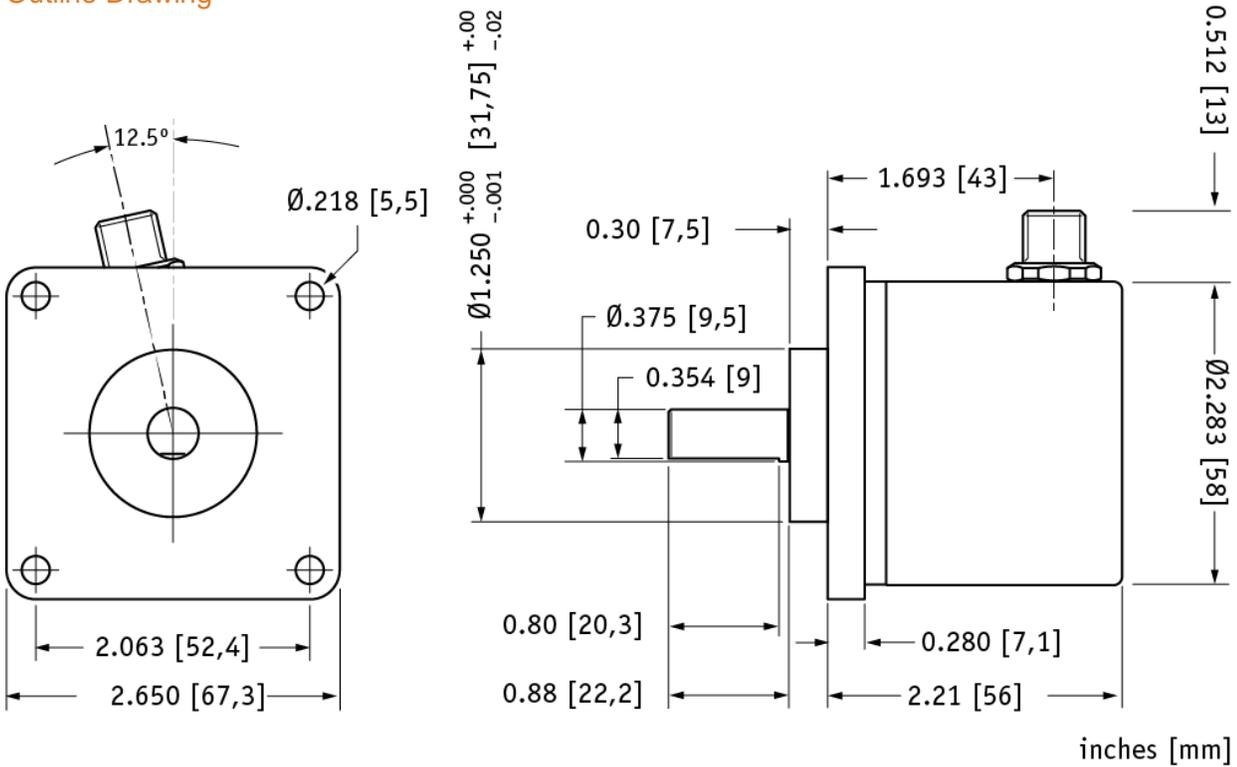

Output Driver

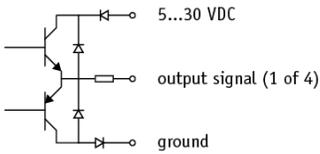



Output Signal Connections



Encoder Pin Connections

pin	signal	pin	signal
1	ground	5	N
2	5...30 VDC	6	channel A'
3	channel A	7	channel B'
4	channel B	8	N'

Output Waveforms

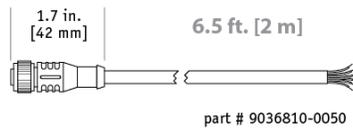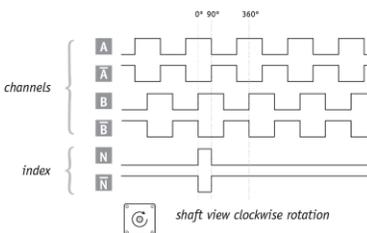

Cord Set Connections

pin	conductor	signal	pin	conductor	signal
(1)	white	ground	(5)	gray	N
(2)	brown	5...30 VDC	(6)	pink	channel A'
(3)	green	channel A	(7)	blue	channel B'
(4)	yellow	channel B	(8)	red	N'

cable specifications

length:	6.5 ft. (2m)
wire size:	24 AWG (.25mm ²)
shield:	yes
cable material:	PVC
cable color:	gray

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

中国大陆

西安鑫源宇通电子科技有限公司
陕西省西安市高新区科技六路西段
西安国家数字出版基地A栋12402
Tel: 400-780-9688
sales@senstechxyz.com

中国香港

深大实业有限公司
香港新界沙田安平街6号新贸易
中心B座13楼06室
Tel: +86 17792099916
info@caltropinstruments.com

新加坡

深大实业有限公司
香港新界沙田安平街6号新贸易
中心B座13楼06室
Tel: +86 17792099919
info@senstechxyz.com