



ED-17

Serial Output Magnetic Encoder

SPECIFICATIONS

- 9-bit absolute encoder**
- Serial SSI interface**
- IP52 sealing**
- Ball bearing**
- Excellent stability – no optic degradation**

The ED-17 magnetic encoder is an absolute encoder with 9-bit resolution.

The device can be easily mounted onto an existing shaft.

The serial output provides absolute angular position information even when power is cycled.

The encoder is designed with modular and flexible construction methods.

FEATURES

- Magnetic sensing technology Encapsulated electronics/sealed unit
- Digital SSI interface
- Low profile
- Consistent rotational torque
- IP52 sealing
- Metallic threaded bushing mounting Industrial temperature range (-40°C to 85°C)
- Excellent stability – no optic degradation

APPLICATIONS

- Marine, avionics position control
- Marine steering
- Pump monitoring and control Camera position and control XY stage positioning
- Radio controls
- Medical diagnostic equipment
- Valve position
- Throttle position control/feedback

PERFORMANCE SPECS (Note1)

Parameters	ED-17-BB-512-S-P
Supply current	30 mA
Operating voltage (Vcc)	5 VDC \pm 5%
Resolution	0.7°
Accuracy	1.4°
Operating temperature range	-40 °C to 85 °C
Power-up time	20 ms

Bearing:

Parameters	ED-17-BB-512-S-P
Bearings	Ball
Maximum speed	3000 RPM
Bearing life	30,000,000 cycles

(NOTE1): Vcc = 5 V, Ambient Temperature 25 °C

MECHANICAL

Parameters	ED-17-BB-512-S-P
Axial load (max.)	20 N
Radial load (max.)	10 N
Shaft end play axial (max.)	0.13 mm
Shaft radial play (max.)	0.25 mm (15.3 mm from thread)
Shaft push-in force	9 N
Shaft pull-out force	1.3 N
Run out (max.)	0.25 mm (19 mm from thread)
Bushing mounting torque	1.1 Nm

DIMENSIONS

all-dimensions mm [inch]

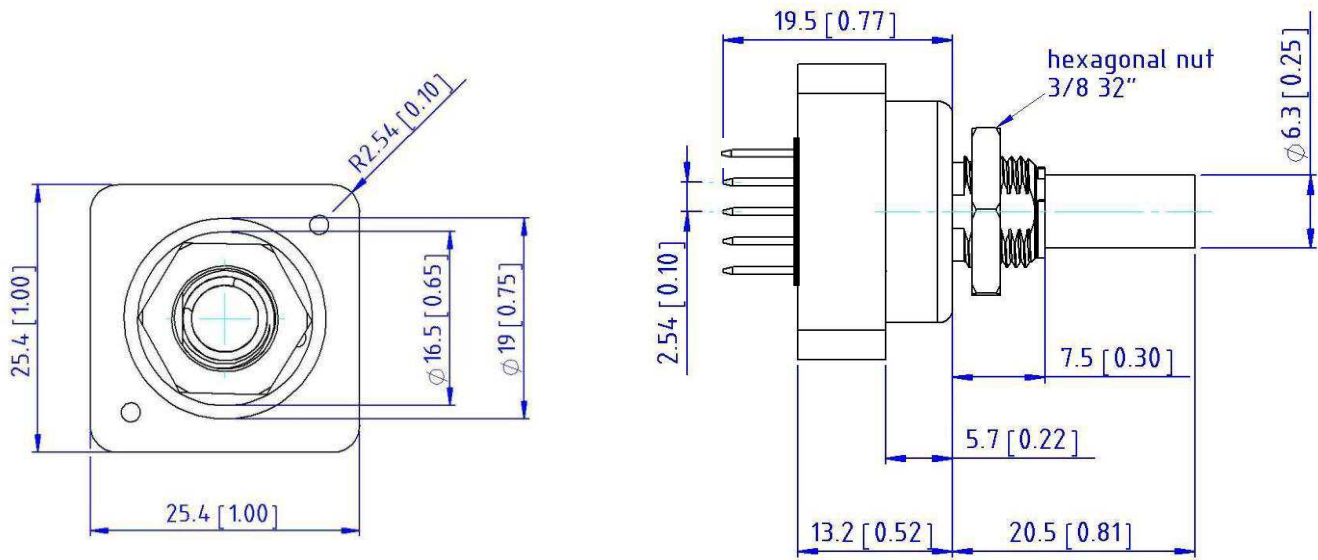


Figure 1: Dimensions of the ED-17-BB-512-S-P (top and side view)

PINNING

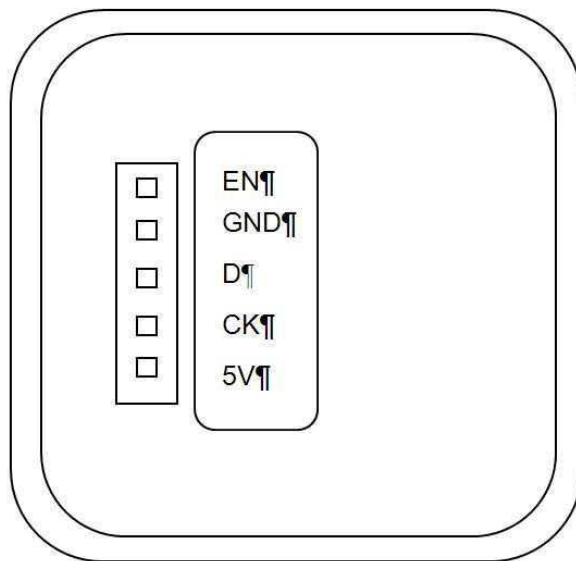


Figure 2: Pinning of the ED-17-BB-512-S-P (bottom view)

BINARY SYNCHRONOUS SERIAL INTERFACE (SSI)

Parameter	Symbol	Min.	Max.	Unit
Clock period	t_{CL}	1.2	16	μs
Clock high	t_{High}	0.6	15.4	μs
Clock low	t_{Low}	0.6	15.4	μs
Delay time	t_D	16	22	μs

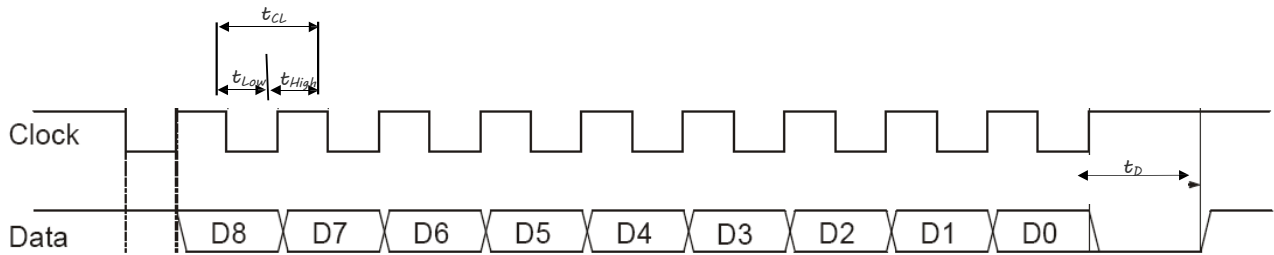


Figure 3: SSI timing diagram

The clock signal must always start from high. At the first low/high transition the encoder transmits the most significant bit (MSB) and at each low/high transition of the clock signal the next data bit is transferred. After sending the least significant bit (LSB) the data line is forced low and before a new position can be read a waiting time of t_D max. is required.

The absolute position can be calculated using (1).

$$rotation\ angle\ SSI\ value = \left(\frac{360}{512} \right) \tag{1}$$


ENVIRONMENTAL

Vibration	MIL-STD-202F Method 204D Test Condition B
Shock	MIL-STD-202F Method 213B Test Condition C
Humidity	MIL-STD-202F Method 103B Test Condition A
Thermal Shock	MIL-STD-202F Method 107G Test Condition A
Operating Temperature	-40 °C to 85 °C
Storage Temperature	-55 °C to 125 °C

ORDERING INFORMATION

PART NUMBERING Model Number+ Bearing+Output resolution+Serial output +Connection

ED-17-BB-512-S-P



Connection
 Output
 Output Range
 Bearing

Options:

P = Pin header
 S = Serial output
 512 = 9-bit resolution
 BB = Ball Bearing

STANDARD CONFIGURATION: ED-17-BB-0512-S-P

Consult factory for other available models.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

中国大陆
 西安鑫源宇通电子科技有限公司
 陕西省西安市高新区锦业路70号航
 天恒星园区1号厂房一层南
 Tel: 400-780-9688
sales@senstechxyz.com

中国香港
 深大实业有限公司
 香港新界沙田安平街6号新贸易
 中心B座13楼06室
 Tel: +86 17792099916
info@caltropinstruments.com

新加坡
 深大实业有限公司
 香港新界沙田安平街6号新贸易
 中心B座13楼06室
 Tel: +86 17792099919
info@senstechxyz.com